

"High Frequency Ceramic Solutions"

868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I.
CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L and CC430

P/N 0896BM15A0001

Detail Specification: 9/24/2013

Page 1 of 4

General Specifications

Part Number	0896BM15A0001	Return Loss	9.5 dB min.
Frequency (MHz)	863 - 928 Mhz	Phase Difference	180° ± 10
Unbalanced Impedance	50 Ω	Amplitude Difference	1.5 dB max.
Differential Balanced Impedance	Impedance-Matched to T.I. CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L and CC430 Chipsets	Operating Temperature	-40 to +125°C
Insertion Loss 1	1.5 dB max (-40C to +85C)	Power Rating	1W max. (CW)
Insertion Loss 2	1.55 dB max (-40C to +125C)	Reel Quantity	4,000
Attenuation (min.)	25 min @ 1726 - 1856MHz	Storage Conditions	+5 ~ +35 °C, Humidity 45~75%RH
	35 min.@ 2589 - 2784MHz		Storage Period
	35 min.@ 3452 - 3712MHz	Moisture Sensitivity Level	
	35 min.@ 4315 - 4640MHz		


*For more info go to www.johansontechnology.com/silverleads

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 0896BM15A0001S
		T & R	Suffix = E	eg. 0896BM15A0001E
	Termination style	AgPt	Suffix = None	eg. 0896BM15A0001(E or S)
	Evaluation Board	0896BM15A0001-EBSMA		


Mechanical Dimensions

	In	mm
L	0.079 ± 0.004	2.00 ± 0.10
W	0.049 ± 0.004	1.25 ± 0.10
T	0.028 ± 0.004	0.70 ± 0.10
a	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
c	0.012 +.004/-0.008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
p	0.026 ± 0.002	0.65 ± 0.05

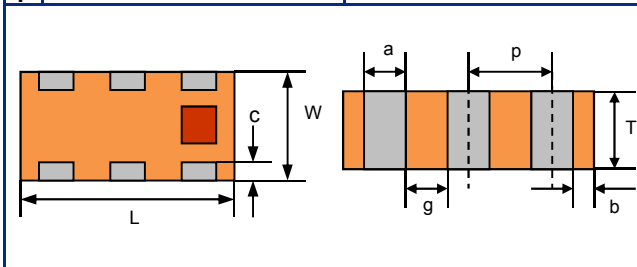

Terminal Configuration

No.	Function
1	Unbalanced Port
2	GND
3	Balanced Port
4	Balanced Port
5	GND
6	GND



www.johansontechnology.com

1001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

Ver 2.0

2013 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I.
CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L and CC430

P/N 0896BM15A0001

Detail Specification: 9/24/2013


Page 2 of 4

Mounting Considerations

* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Mount device with colored mark facing up.

Pin reference

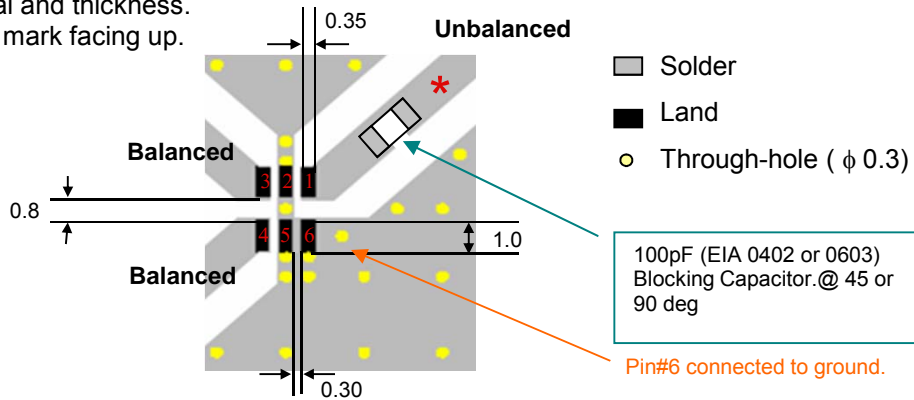


Units: mm

Additional output filtering may be required depending on output power in order to comply with FCC and/or ETSI regulations

Mount device with colored mark facing up.

For an Application note as to how to implement this component and obtain gerber files, go to:
www.johansontechnology.com/ti
or contact our application team at:
www.johansontechnology.com and click on "Ask a Technical Question" Tab

Component P/N:
5.6nH Inductor: L-07C5N6SV6T
1.8pF Capacitor: 500R07S1R8BV4T

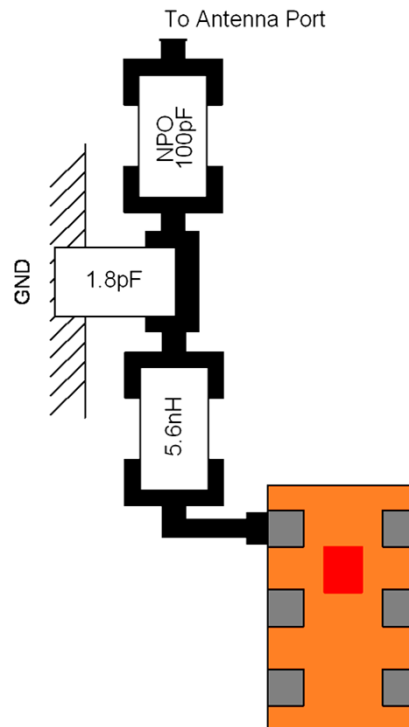

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2013 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I.
CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L and CC430

P/N 0896BM15A0001

Detail Specification: 9/24/2013

Page 3 of 4

Typical Electrical Characteristics (T=25°C)

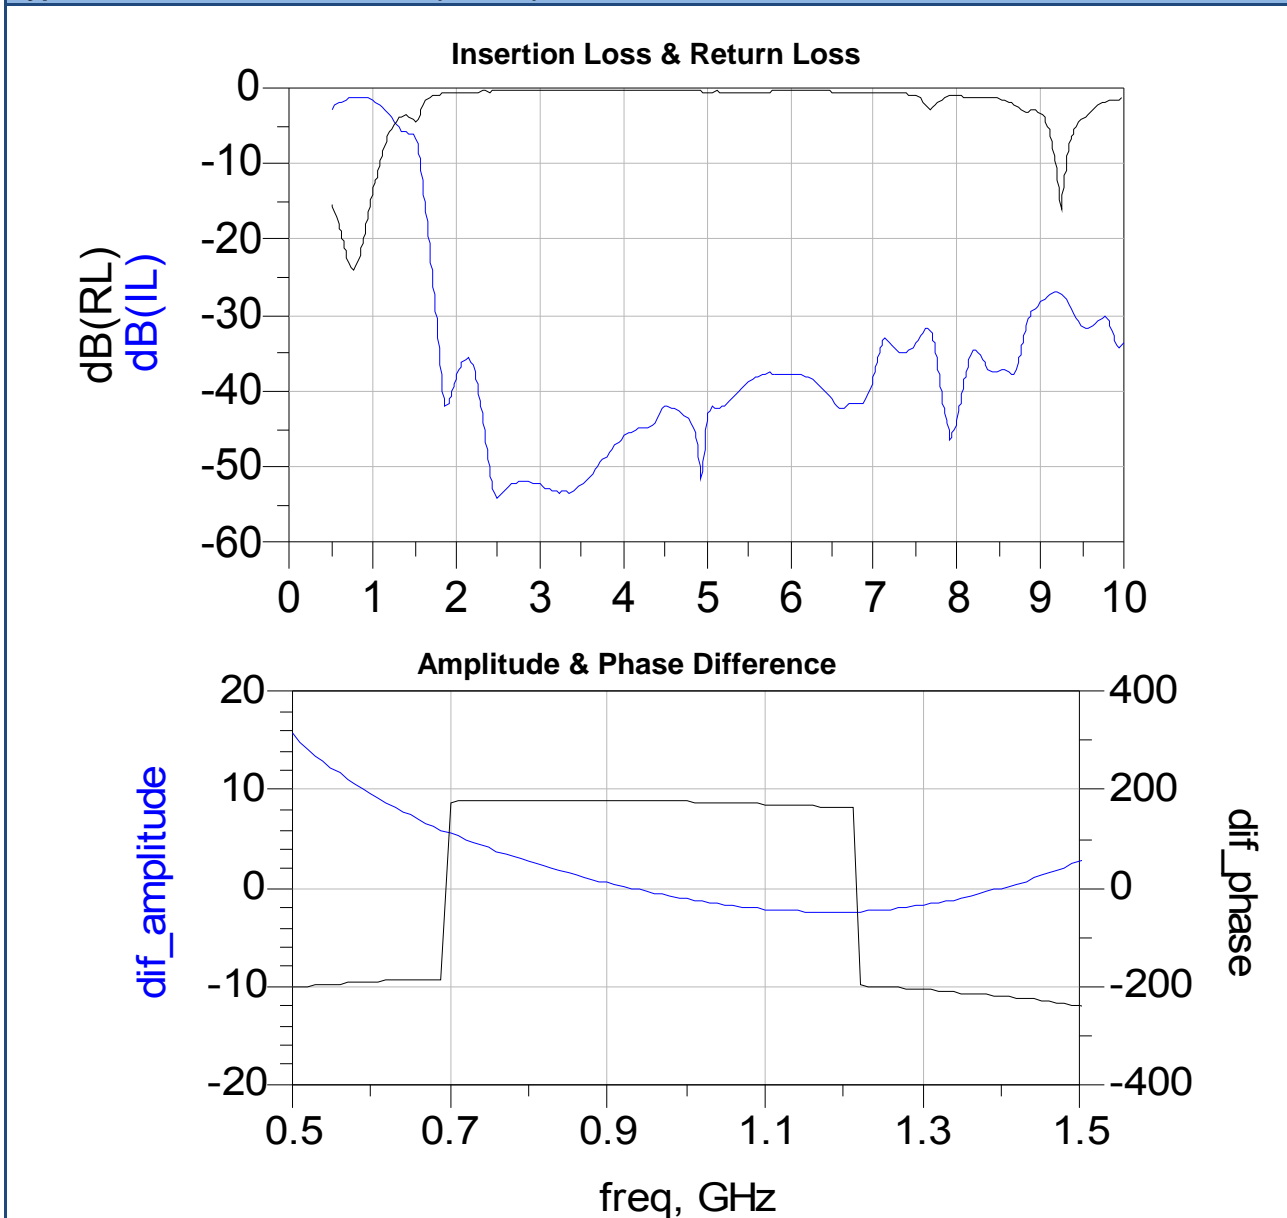

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2013 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"


868/915 MHz Impedance Matched/Balun/LPF Integrated Component for T.I.
CC110X, CC111X, CC113X and CC115X, CC110L, CC113L, CC115L and CC430

P/N 0896BM15A0001

Detail Specification: 9/24/2013

Page 4 of 4

Appearance

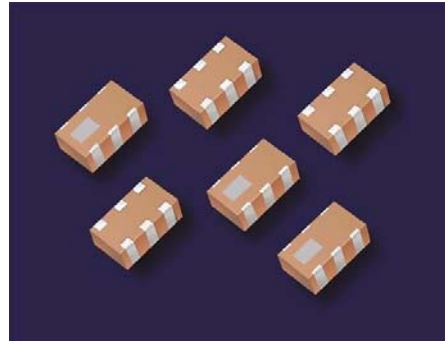

RoHS Compliance

www.johansontechnology.com/technical-notes/rohs-compliance.html

Packaging information

www.johansontechnology.com/ipcpackaging.html

Soldering Information

www.johansontechnology.com/ipcsoldering-profile

Antenna layout and tuning techniques

www.johansontechnology.com/tuning

Antenna layout review, tuning, and characterization services

www.johansontechnology.com/ipcantennaservices

Pad metalization information

www.johansontechnology.com/silverleads

MSL Info

www.johansontechnology.com/technical-notes/msl-rating.html

Recommended Storage Condition and Max Shelf Life

www.johansontechnology.com/ipcstorage-shelflife

and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



Ver 2.0

www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2013 Johanson Technology, Inc. All Rights Reserved